



MX-8

©2008





-
-
-




Arial

```
[ ]      [ ]  
  
{ x | y | ... }  
  
[ x | y | ... ]  
  
//
```


1.



2.



3.



Enter a

a

“ → ”

→

1+ 2
“ Alt ” “ A ”

Ctrl+Alt+A “ Ctrl ”

1 2 Alt F Alt
F

1

1.1

- RingMaster —
- MX MP WLAN
- Mobility Point (MP) (RF) — MX
- Mobility System Softwar (MSS) — MP WLAN RingMaster MX


1.2 MX-8

MX-8 MX

MP

8 10/100Mbps 6

PoE 12 MP

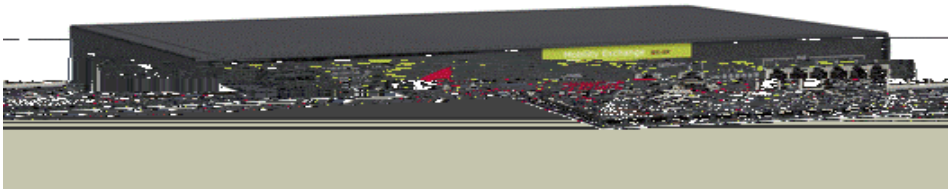

2-1 MX-8







	8 10/100Mbps 6 PoE 1
	-10 ° 50 ° -20 ° 70 ° 10 90
	93 132VAC 180 264VAC 50 60Hz 4A 115VAC / 2A 230VAC
PoE	48VDC 91.8W 15.3W PoEÖ

	• RFC 1591 DNS • RFC 2030 SNMP • RFC 768 UDP • RFC 783 TFTP • RFC 791 IP • RFC 792 ICMP • RFC 793 TCP • RFC 826 ARP • IEEE 802.1D Spanning Tree • IEEE 802.1Q VLAN tagging • IEEE 802.3ad (static config)
	• RFC 854 Telnet (server and client) • SSHv2 - Secure Shell V2 • SNMP v1/ v2c/ v3 • RFC 1213 MIB-II • RFC 1866 HTML • RFC 2068 HTTP • RFC 3164 Syslog • private MIB • IETF CAPWAP
IP	• RFC 1112 IGMP v1 • RFC 2236 IGMP v2
QoS	• 802.1p QoS on Ethernet • 802.11e, Wi-Fi Multimedia (WMM) • SpectraLink Voice Priority (SVP) • RFC 2472 DiffServ precedence • RFC 2597 DiffServ Assured Forwarding • RFC 2598 DiffServ Expedited Forwarding

2

					
			£	£	
2.1					
	LED	œ	MX-8	œ	£
2.2					
console		9600/8bit/1 stop/no pority/hardware flow control off			
					