





锐捷®







-
-
-









-
-
-
-



-
-
-
-
-
-





-
-
-
-




}
u

-
-
-
-




u




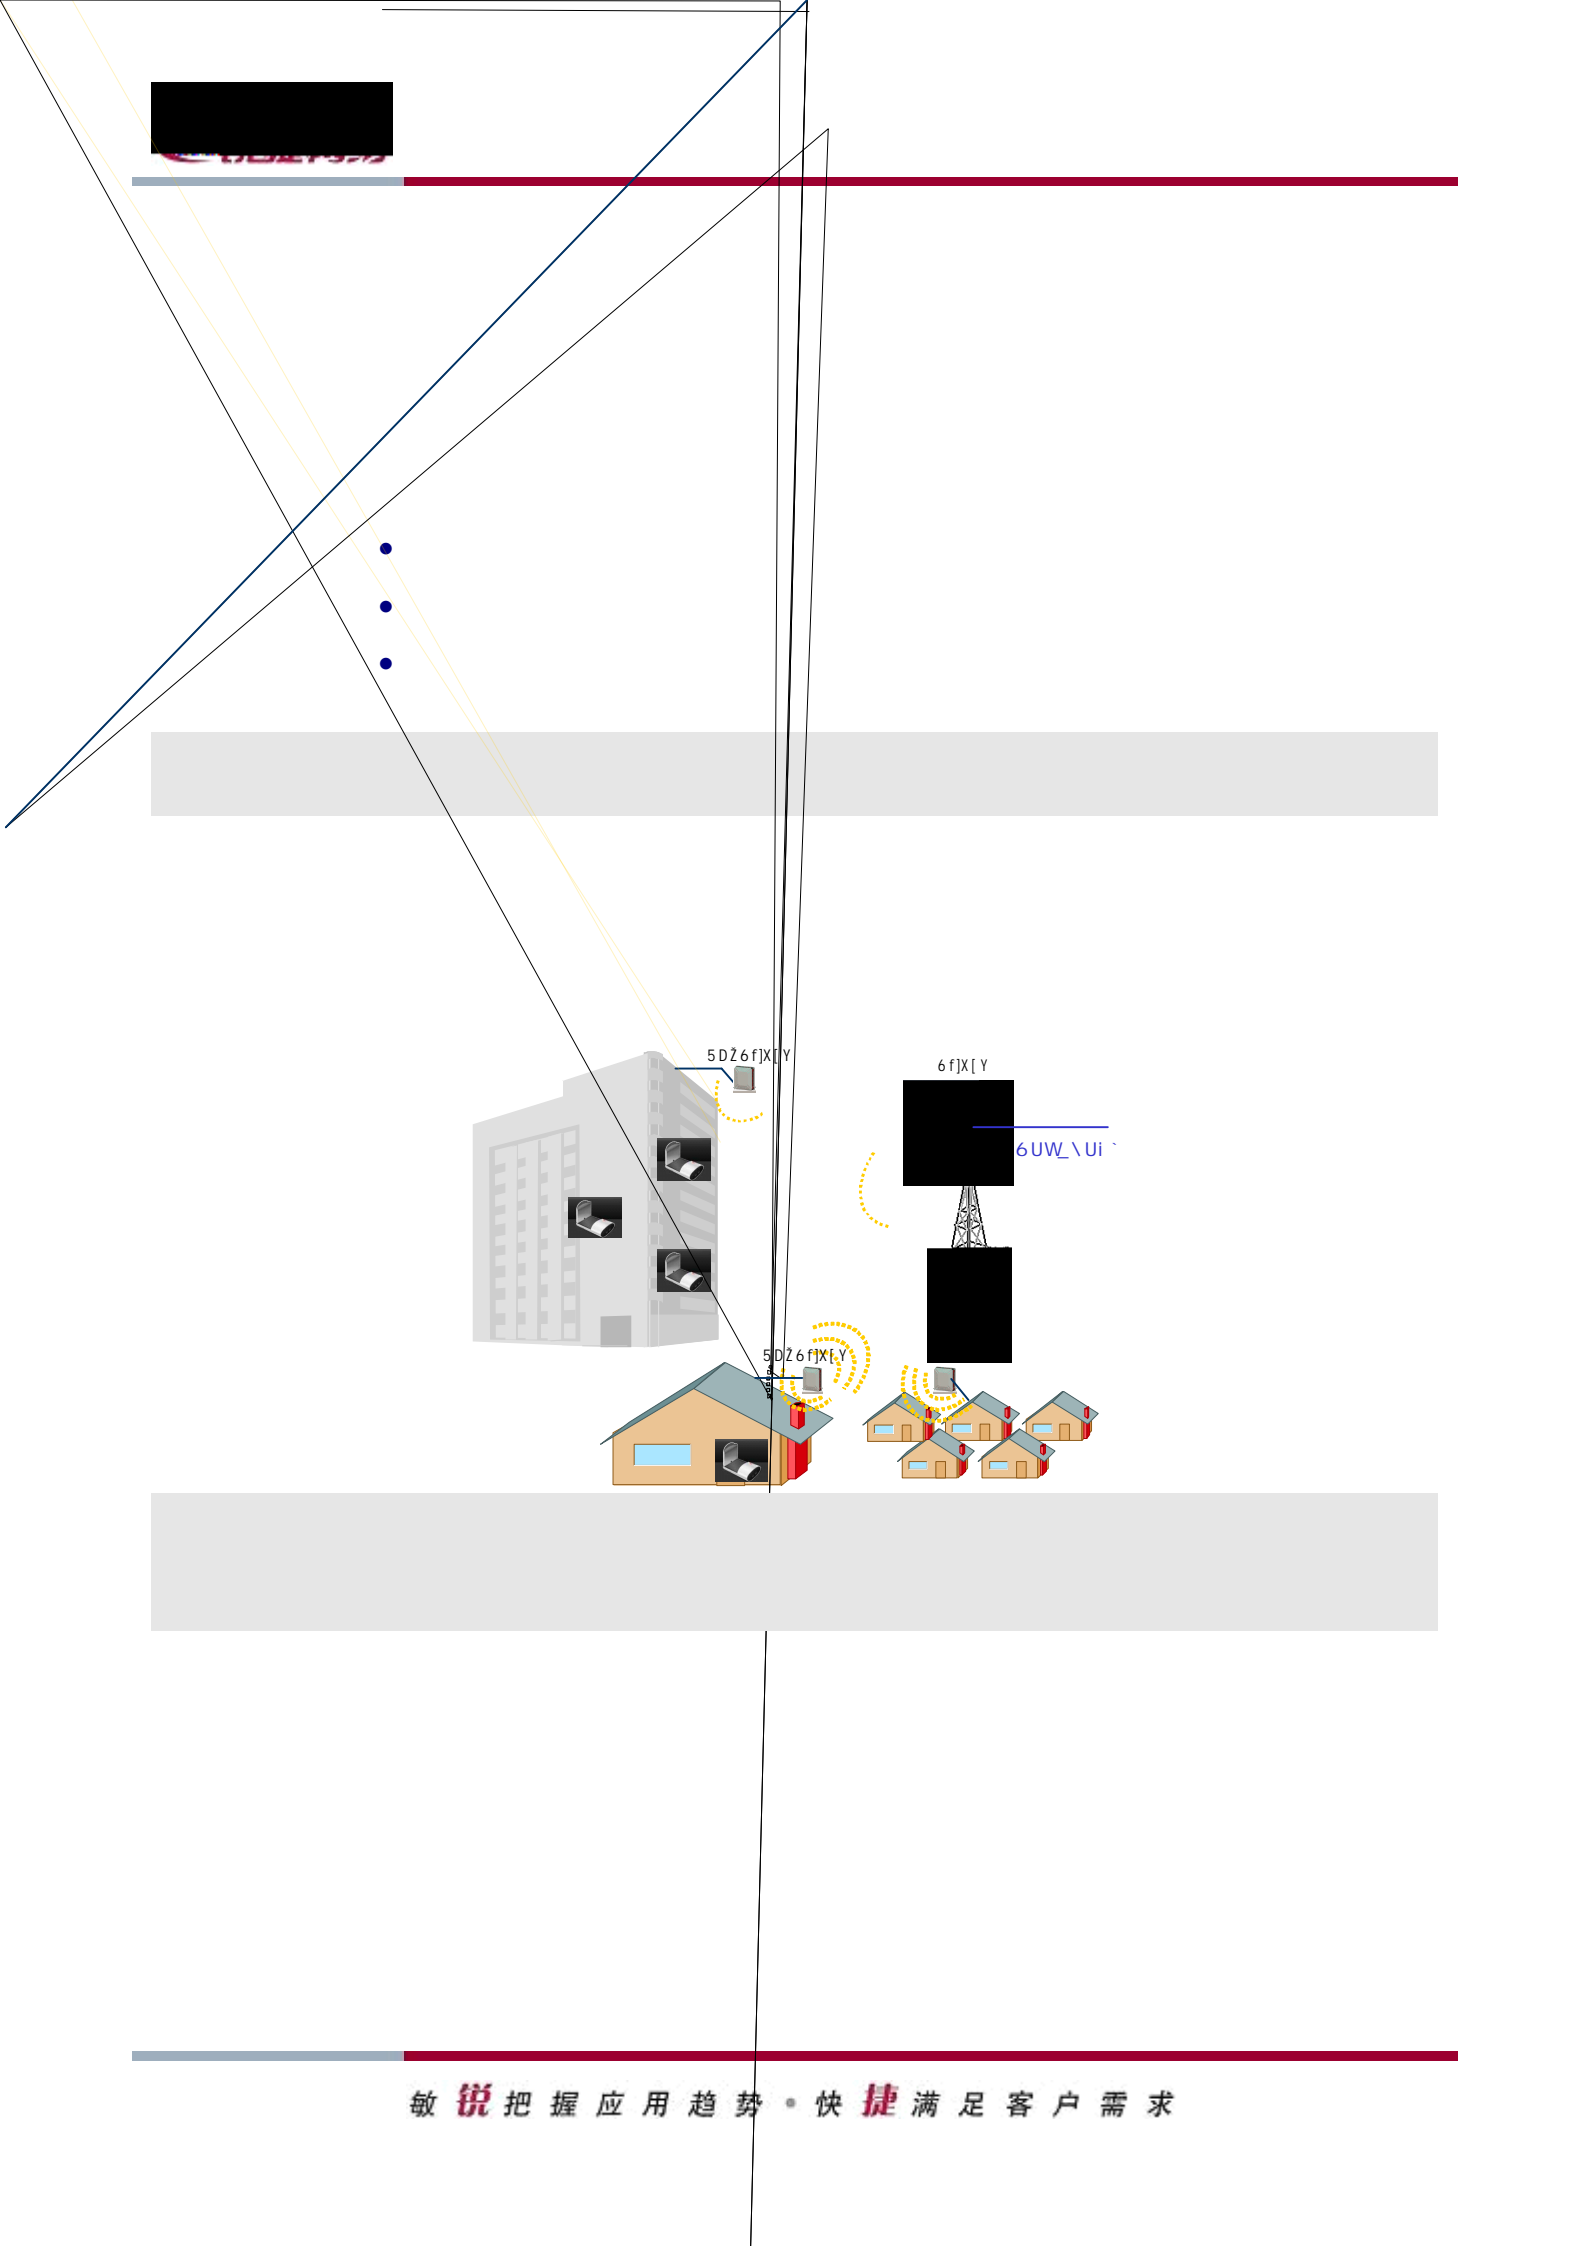


敏**锐**把握应用趋势 • 快**捷**满足客户需求


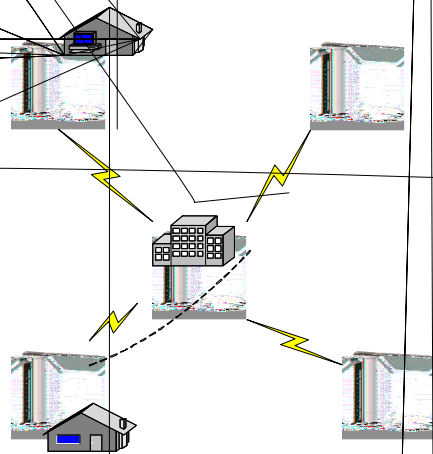


敏**锐**把握应用趋势 • 快**捷**满足客户需求



-
-
-
-
-
-
-
-
-
-
-

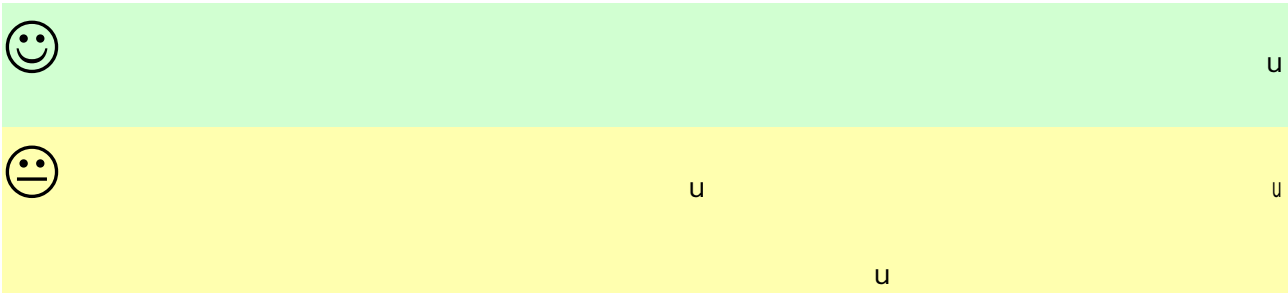

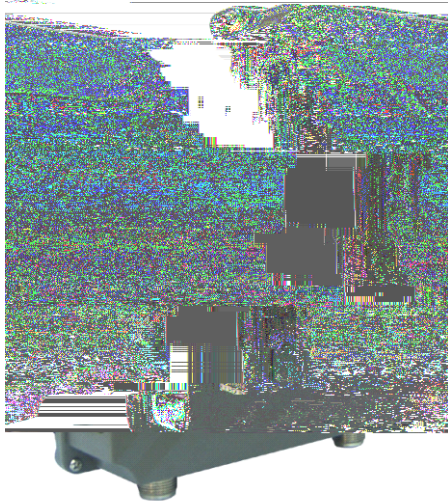

-
-
- **Reset**



Reset


Reset

u


-




-
- **LAN**
- **Reset**

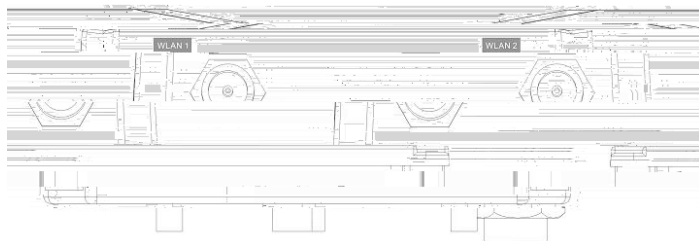





u






U



LAN-IN


PWR-LAN OUT

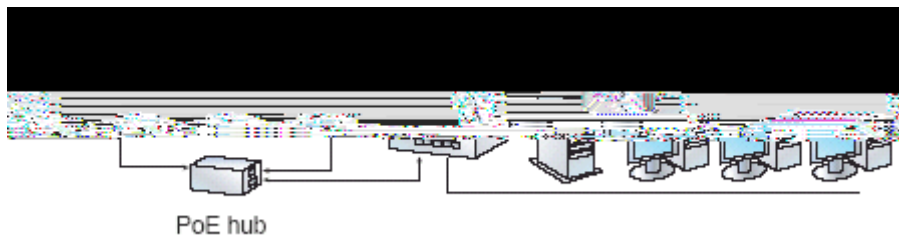



admin

admin01

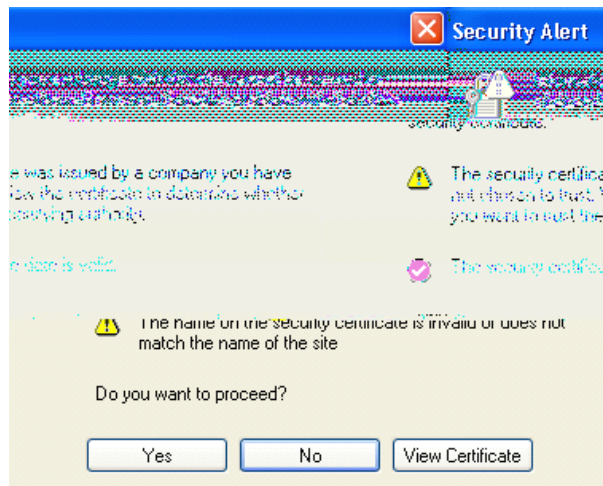



P780 Administration

User name:


Password:


Remember my password

OK Cancel

P-780 EXIT >


Status	Network	Wireless	System
--------	---------	----------	--------







Frequency range	2400 MHz - 2483.5 MHz
Peak gain	4.5 dBi
Average gain	2.5 dBi
VSWR	2.0
Power handling	2 W (cw)
Impedance	50 Ohms
Connector	RP-N plug
Survival wind speed	210 km/h
Temperature	-40°C to +70°C
Material	Gray
Weight	10 g
Dimensions	φ22 x 183 mm

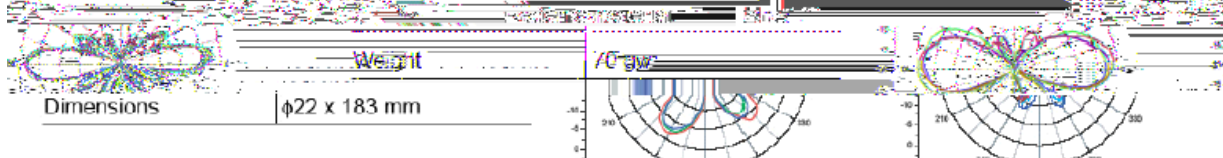

φ22

