



RG-DBS

η

98

V3.0.2


5

'Y

ˆE˜ ©2008

ˆ G ¯w ⊕ ≠ Â

ˆE˜ й ˆ ˆ κ ν ι β ω ˆ Ъ ˆ L
й ρ № η ˆ ˆ ˆ γ κ ν ˆ D Â

  ® à  ® à  ® à
锐捷® à  ® à  ® à 

ˆE˜ ˆY ˆ ˆ ω Â

й ви й ↓ т


т

д r Aria ĩ r т ъ й'


г т

1	ν	Ⓛ		2	
2	ν α	Ⓛ	Ⓛ		4
2.1	κ		network		4
2.2	–		recover		6
2.3			restart		6
2.4	τ		shutdown		6
2.5	κ		password		6
2.6			reset		7
2.7	⌘	exit			


1



~ γ α ϖ í putty.exe ssh í ~ Η
 ο ~ system system Ἧ ^ γ putty 4 ϖ ~



IP η ~ ϖ ϖ Γ Open L ~ ϖ γ Ἧ

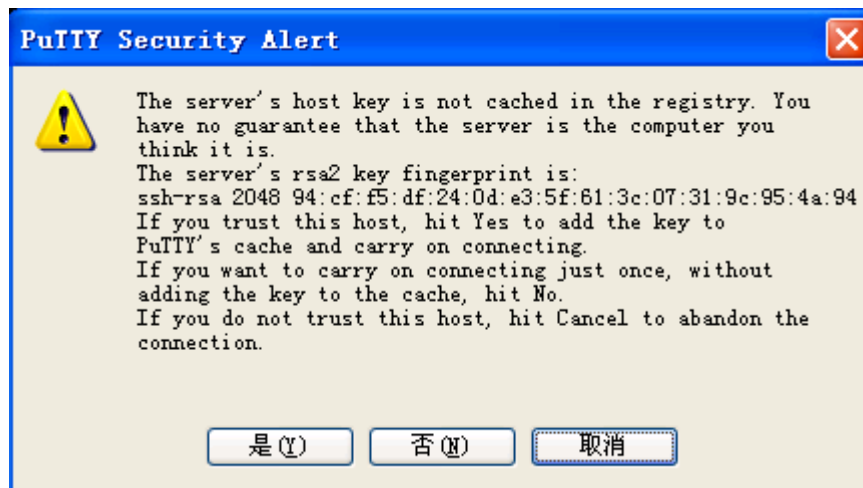

Γ Ε

~ ~ Γ login as Ε

~ Γ system Ε

Γ password Ε

~ Γ system Ε

~ Ё ψ ~

~ √ ~

~ | ρ

Й Â

2.2 recover

system ~ recover ~ Й ,

```
Command>recover
This command will delete all audit data and recover system to initial state.
If you changed the IP address of the communication port, and is currently logged
into the system through the communications port, you should use the initial IP
address to reconnect after recover the system
Do you want recover the system(y/N)?
```

ϑ - | Δ Â Ηο Ηο IP | № Λ Â
~ γ - w~ | Δ , ~ η | ϑ Â

2.3 restart

system ~ restart ~ , ~ √'

```
Command>restart
Do you want to restart the system(y/N)?
```

~ γ , ~ η | ϑ Â

2.4 shutdown

system ~ shutdown ~ ~ Й ,

```
Command>shutdown
Do you want to shutdown the system(y/N)?
```

~ γ , ~ η | ϑ Â

2.5 password

system ~ password ~ к ~ Й ,

```
Command>password
Do you want to change password of the system (y/N)?
```

$\acute{k}$ $w^{\sim}$ $\updownarrow$ $\nexists$ $\acute{k}$ w $\int$ $\mathfrak{D}$ $\sim$ $\mathfrak{H}$ $'$

